




SERIES : LSP : LIGHT WEIGHT, SPRING RETURN CYLINDER WITH PLAIN RAM

Applications : These cylinders can be used in a wide variety of situations such as routine maintenance, production, industrial body building, frame works, shipyards heavy civil constructions such as bridges these can also be used in hydraulic presses and other special purpose.

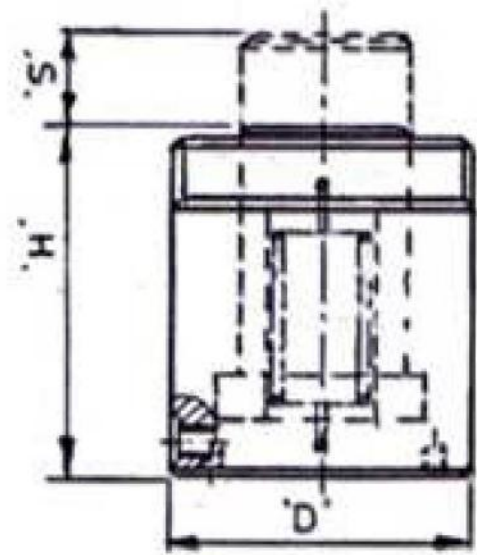

Features :

- Heat treated alloy steel body.
- Ram return by spring allows in any position.
- Hard chrome plated ram for surface protection.
- High pressure, long life seals.
- Non-skidding heat treated saddle.
- Supplied with quick coupler with dust cap.
- Fixing holes at the base or threading on cylinder body, surface treatment on cylinder body, tilting saddle also can also be provided on request.
- Working pressure 700 bar.
- Cylinder tested to ANSI standards.



Bemco Jacking Systems Pvt. Ltd.

MODEL	CAPACITY tons	STROKE 'S' mm	CLOSED HT. 'H' mm	OUTER DIA. 'D' mm	APPROX WEIGHT Kg
LSP 10/25	10	25	90	60	1.7
LSP 10/50	10	50	121	60	2.2
LSP 10/100	10	100	171	60	3.0
LSP 10/150	10	150	248	60	4.4
LSP 10/200	10	200	298	60	5.2
LSP 10/250	10	250	348	60	5.6
LSP 10/300	10	300	400	60	6.1
LSP 15/25	15	25	124	70	3.3
LSP 15/50	15	50	149	70	3.7
LSP 15/100	15	100	200	70	4.8
LSP 15/150	15	150	272	70	6.4
LSP 15/200	15	200	322	70	7.3
LSP 15/250	15	250	373	70	8.1
LSP 15/300	15	300	424	70	9.5
LSP 25/25	25	25	140	90	6.2
LSP 25/50	25	50	165	90	7.1
LSP 25/100	25	100	216	90	8.9
LSP 25/150	25	150	272	90	11.1
LSP 25/200	25	200	324	90	12.9
LSP 25/250	25	250	375	90	14.6
LSP 25/300	25	300	426	90	16.4
LSP 30/50	30	50	165	100	8.7
LSP 30/100	30	100	215	100	10.9
LSP 30/150	30	150	265	100	13.1
LSP 30/200	30	200	315	100	15.3
LSP 30/250	30	250	365	100	17.5
LSP 30/300	30	300	415	100	19.7
LSP 50/50	50	50	176	125	15.0
LSP 50/100	50	100	227	125	18.0
LSP 50/150	50	150	282	125	21.0
LSP 50/200	50	200	320	125	23.0
LSP 50/250	50	250	370	125	26.0
LSP 50/300	50	300	420	125	29.0
LSP 75/100	75	100	220	150	26.0
LSP 75/150	75	150	286	150	32.0
LSP 75/200	75	200	320	150	34.0
LSP 75/300	75	300	420	150	43.0
LSP 100/100	100	100	220	175	34.0
LSP 100/150	100	150	270	175	40.0
LSP 100/200	100	200	320	175	47.0
LSP 100/300	100	300	420	175	60.0